




ACEROS ROSCADOS

VALVE

Compuerta AWWA C509

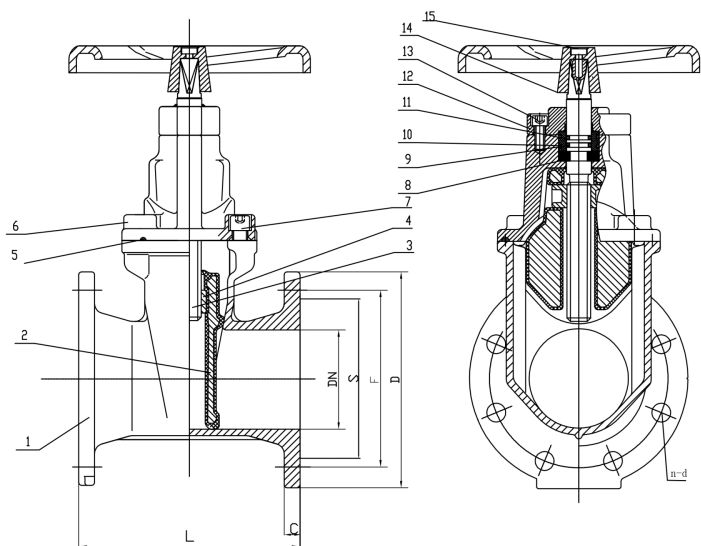

DN	L	AWWA C509			
		D	f	c	n-d
50	178	152	120.5	19.1	4-19
65	190	180	139.5	19.1	4-19
80	203	190	152.5	19.1	4-19
100	229	229	190.5	23.9	8-19
125	254	254	216.5	23.9	8-22
150	267	279	241.5	25.4	8-22
200	292	343	298.5	28.6	8-22
250	330	406	362.5	30.2	12-25
300	356	483	432	31.8	12-25
350	381	533	476.5	35	12-29
400	406	597	539.5	36.6	16-29

Item	Parts	Material
1	Body	GGG50
2	Disc	GGG50+EPDM
3	Stem	Brass
4	Stem nut	Brass
5	Gasket	EPDM
6	Bonnet	GGG50
7	Bolts	Carbon steel
8	Holding ring	Brass
9	O ring	NBR
10	O ring	NBR
11	seal cartridge	POM
12	Gland	GGG50
13	Bolts	Carbon steel
14	Hand wheel	GGG50
15	Bolt	Carbon steel

STANDARDS APLLIED

- 1, Design standard: ANSI/AWWA C509
- 2, Face to face dimensions: ISO 5723 3 Series/ASTM B16.10
- 3, Connecting flanges: B16.1/B16.42
- 4, Testing standard: AWWA C509

Technical characteristic	
Nominal size mm	DN50-400
Class MPa	Class 150
Suitable temp	≤ 80° C
Medium	Water



SUCURSAL
CIUDAD DE MÉXICO
(55) 5715 0712
(55) 5714 276

MATRÍZ
MONTERREY NUEVO LEÓN
(81) 8239 0074 / (81) 8239 0075
(81) 8212 0225 / (81) 8212 0226
☎(81) 3448 7300 / ☎(81) 3449 8656

SUCURSAL
GUADALAJARA JALISCO
(33) 3619 2880
(33) 3650 3319