




ACEROS ROSCADOS

FICHA TECNICA | NIPLE BOTELLA

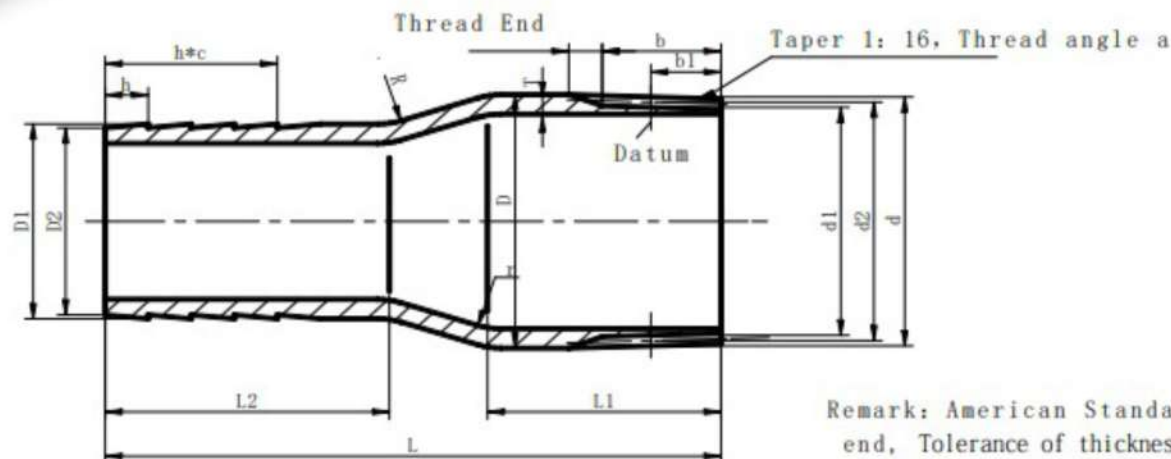

Remark: American Standard 3.47 threads end, Tolerance of thickness is +12.5%, -15%

Standard	Size	Outside diameter D	Tolerance	Thickness T	Thread length		Diameter of thread base plane			Thread/ inch	Length L	Threaded end length L1	Sawtooth end length L2	Sawtooth			Thread angle a	R	r
					Effective length b	Datum length b1	Outside diameter d	Middle diameter d2	Minimum diameter d1					D1	D2	h*c			
American standard cold plating	6 "	168.3	±1%	4.5	38.42	24.33	167.79	165.25	162.71	8	230	95	103	150	147	11*8=88	60	40	30
	5 "	141.3		4.0	35.72	23.8	140.95	138.41	135.87		220	85	103	125	122	11*8=88		40	
	4 "	114.3			33.02	21.44	113.97	111.43	108.89		200	80	92	101	98	11*7=77		40	30
	3 "	89		3.75	30.48	19.46	88.61	86.07	83.53		152	55	80	78	76	10*7=70		20	15
	2 1/2 "	73.1			28.89	17.32	72.7	70.16	67.62		150	60	72	64.5	62	10*6=60		35	25
	2 "	60.4	±0.5	3.5	19.22	11.07	60.092	58.33	56.56	11.5	115	40	58	52	50.5	9*6=54			13
	1 1/2 "	48.3			18.38	10.67	48.054	46.29	44.52		102	35	50	39	37.3	7.5*6=45			10
	1 1/4 "	42.3		3.25	17.95	10.67	41.985	40.22	38.45		93	35	43	32.5	31.2	6.5*6=39			11
	1 "	33.5			17.34	10.16	33.228	31.46	29.69		85	32	40	26	24.8	6*6=36			10
	3/4 "	26.7		2.75	13.86	8.61	26.568	25.12	23.67	14	80	30	37	19.7	18.5	5.5*6=33			6
	1/2 "	21.4			13.56	8.13	21.223	19.77	18.32		76	30	34	14.7	13.2	5*6=30		10	8
	3/8 "	17.2		2.25	10.36	6.1	17.055	15.93	14.8	18									
	1/4 "	13.7			10.21	5.79	13.572	12.44	11.31										
	1/8 "	10.3		2						27									



ACEROSROSCADOS.COM.MX

SUCURSAL
CIUDAD DE MÉXICO
(55) 5715 0712
(55) 5714 276

MATRÍZ
MONTERREY NUEVO LEÓN
(81) 8239 0074 / (81) 8239 0075
(81) 8212 0225 / (81) 8212 0226
☎(81) 3448 7300 / ☎(81) 3449 8656

SUCURSAL
GUADALAJARA JALISCO
(33) 3619 2880
(33) 3650 3319